

# ATLAS KOMPAKT


Electric Driven Scissor Scissor-type  
Aerial Work Platform

## ACSL0607DC

### Dimension


 [www.atlas-kompakt.com](http://www.atlas-kompakt.com)

Working height*		6.5 m
A	Platform height maximum	4.5 m
B	Platform height (stowed)	0.95 m
C	Platform length	1.29 m
	Slide-out platform extension deck	0.6 m
D	Platform width	0.7 m
E	Stowed height (rails up)	2.06 m
	Stowed height (rails down)	1.7 m
F	Overall length	1.44 m
G	Overall width	0.76 m
H	Wheelbase	1.05 m
I	Ground clearance (stowed)	0.06 m
J	Ground clearance (raised)	0.017 m

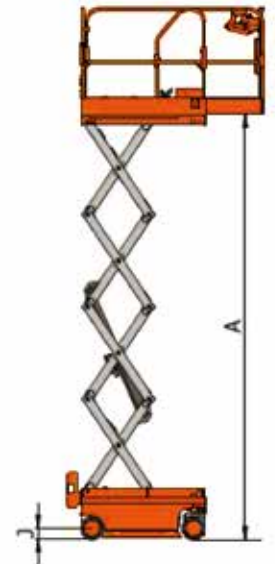

### Performance

Lift capacity		240 kg
Lift capacity (extension deck)		100 kg
Max. platform occupancy		2
Drive speed (stowed)		3.6 km/h
Drive speed (elevated)		0.8 km/h
Turning radius (inside)		0.4 m
Turning radius (outside)		1.6 m
Raise / lower speed		20 s / 22 s
Gradeability**		30%
Max. allowable working angle (lateral / longitudinal)		1.5° / 3°
Controls		Proportional
Wheel driver		DC motor front drive
Multiple disc brakes		Dual front wheel
Tires		230 mm x 80 mm
Battery		2x12V / 85 Ah
Charger		24V / 15 A
Weight		900 kg



\* Working height is equal to Platform height plus 2 m.

\*\* Climbing ability is suitable for driving on slopes; Refer to Operator Manual for slope level.

# Electric Driven Scissor Scissor-type Aerial Work Platform

## ACSL0607DC



*Electric Driving  
Motor*



### Standard features

- Proportional control
- Solid tire
- Horn
- Pothole protection device
- Tilt sensor with alarm
- Extended platform
- Hour meter
- Flashing beacon
- Emergency descent system
- Charging protection system
- Folding guardrails platform
- Standard transport forklift hole
- Action beep
- Emergency stop button
- Fault diagnosis system
- Self-lock gate on platform
- Safety maintenance support rod
- DC motor drive
- Automatic brakes system
- Maintenance-free battery